




## FEATURES & BENEFITS

- ❖ 5 gallon volume @15k psig
- ❖ ASME U-1A code stamp standard
- ❖ ABS & DNV certifications available
- ❖ Short, compact design
- ❖ Top repairable
- ❖ 316 SS or Inconel groove inlays available
- ❖ All fasteners have corrosion resistant coating
- ❖ Standard 2-9/16" API Type RTJ (BX-153)

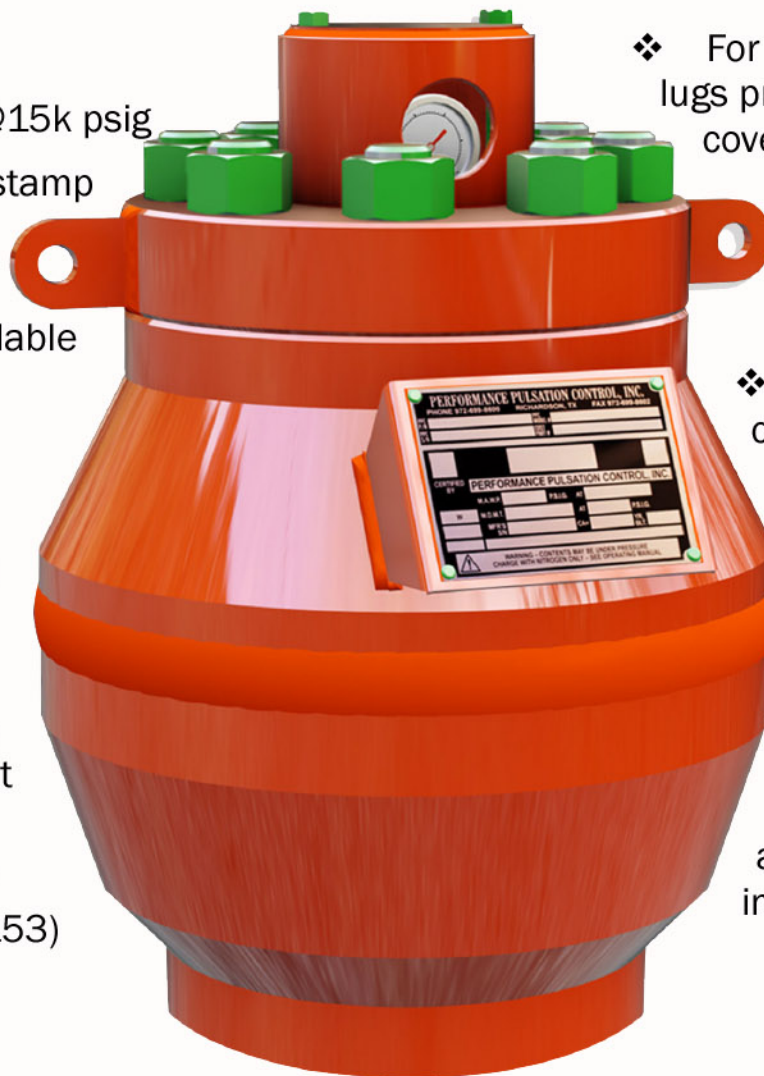

- ❖ For added safety, lifting lugs provided on O.D. of coverplate
- ❖ Protected charging valve and pressure gauge
- ❖ High pre-charge capability delivers excellent dampening performance
- ❖ Nitrile (NBR), Hydrogenated Nitrile (HNBR)
- ❖ Diaphragm kits are fully interchangeable with standard industry products

# The PD Series


Tougher, Safer, Stronger...Smarter

PD Series Gas Charged Dampener - Fracturing & Well Services

MODEL	VOLUME	MAWP	CONNECTION	ADAPTER PLATE	DIAPHRAGM	ASSEMBLY PART #
PD05-15000	5	15000	2-9/16" API 15000 RTJ	Carbon Steel (CS)	NBR	PD05150-01011
					HNBR	PD05150-07011


★ Additional API connection sizes are available upon request.

Before & After PD05-15k

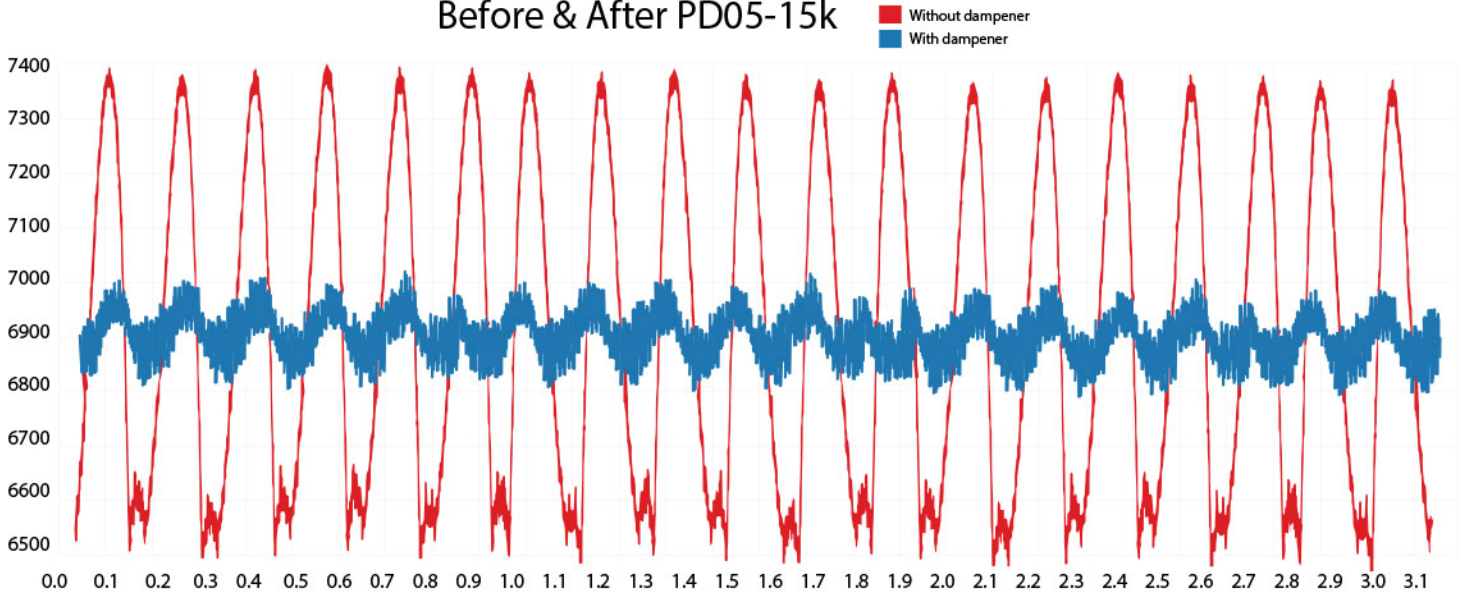

Discharge "E" location comparison, @ 6900 PSI & 128 RPM

Before

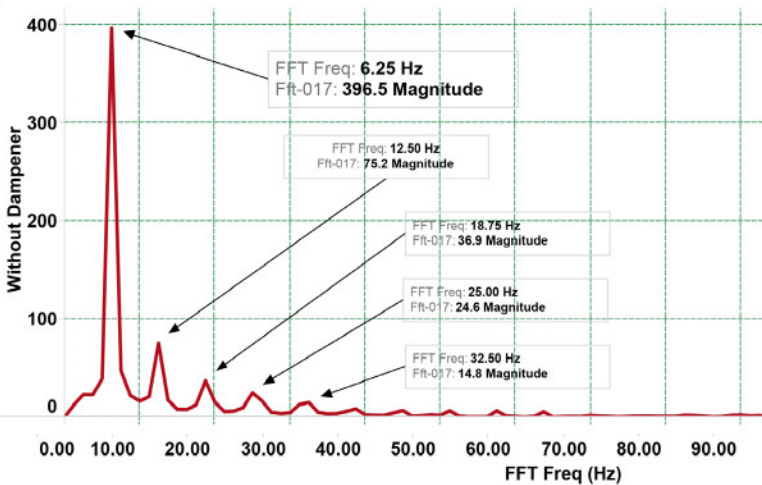

After

