



# SUCTION STABILIZER - VTSR™





## FEATURES & BENEFITS

- ❖ Maintenance Free
- ❖ Flow Through Design Isolates Pump From System
- ❖ Contained Liquid Volume Virtually Eliminates Acceleration Pressure Losses
- ❖ Reduces "Total System" Cost
- ❖ Increases NPSH Available
- ❖ Virtually No Pressure Drop
- ❖ Operates Across All Pressure Ranges
- ❖ High and Low Temperature Capability
- ❖ Customized Arrangements Available
- ❖ Nozzles Arrangement to Accommodate Installation Requirements
- ❖ Inlet/Outlet Nozzles Can Be Different
- ❖ No Elastomers
- ❖ No Expendable Parts
- ❖ No Gas Charging
- ❖ Corrosion Resistant Materials Available
- ❖ Can Accommodate Harsh Flow Streams

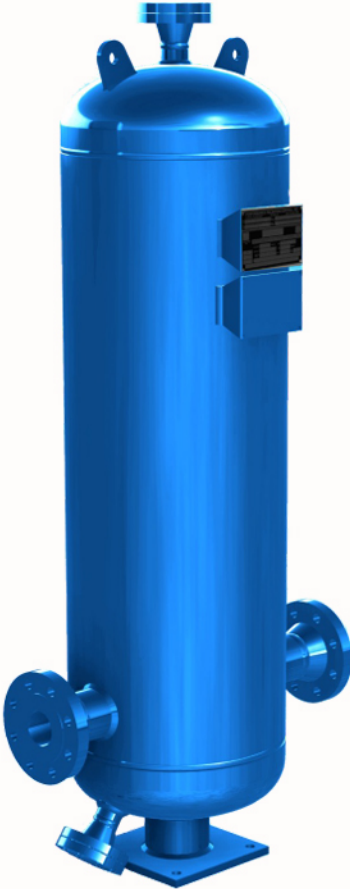

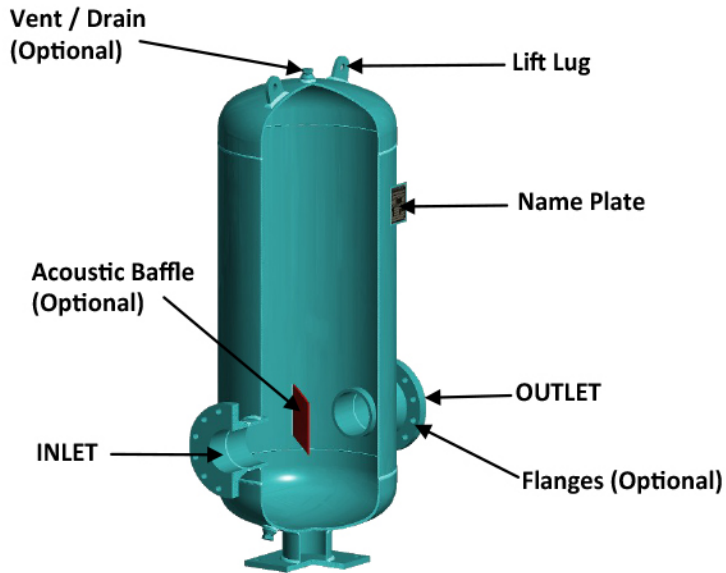

### OTHER CONNECTIONS:



MODELS	Standard Pressure Ranges up to 275 psi
VTSR-10	Designs Available at High Pressures - Up to 3000 psi and Above
VTSR-12	
VTSR-14	
VTSR-16	
VTSR-20	<i>PPC also offers custom engineered solutions &amp; sizes for special customer requirements</i>
VTSR-24	
VTSR-30	

