

PD20 Series



FEATURES & BENEFITS

- 20 gallon volume @5000 and 7500 psig
- ASME U-1A code stamp standard
- ABS & DNV certifications available
- Short, compact design
- Top repairable
- 316 SS or Inconel groove inlays available
- All fasteners have corrosion resistant coating
- Standard 4-1/16" API Type RTJ



 For added safety, lifting lugs provided on O.D. of coverplate

- Protected charging valve and pressure gauge
- High pre-charge capability delivers excellent dampening performance
 - Nitrile (NBR),Hydrogenated Nitrile (HNBR)

 Diaphragm kits are fully interchangeable with standard industry products




Tougher, Safer, Stronger...Smarter

PD Series Gas Charged Dampener Drilling Services

MODEL	VOLUME (gallons)	MAWP (psig)	CONNECTION	ADAPTER PLATE MATERIAL	DIAPHRAGM MATERIAL	ASSEMBLY PART #
PD20-5000	20	5000	4-1/16" API 5000 RTJ	Carbon Steel (CS)	NBR	PD2050-01011
					HNBR	PD2050-07011
					URETHANE	PD2050-09011
PD20-7500	20	7500	4-1/16" API 10000 RTJ ★	Carbon Steel (CS)	NBR	PD2075-01011
					HNBR	PD2075-07011
					URETHANE	PD2075-09011

* Additional connection sizes and API & ANSI ratings are available upon request.

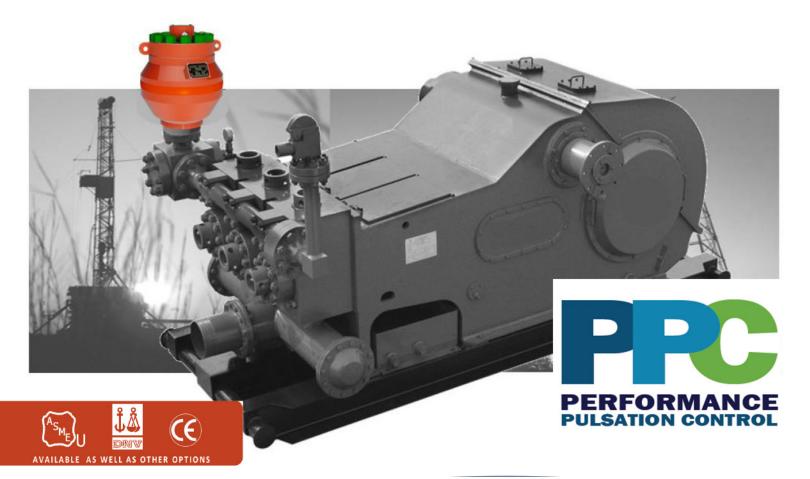

Performance Pulsation Control | www.performancepulsation.com | 972.699.8600 | sales@performancepulsation.com