




FEATURES & BENEFITS


- ❖ 2400 & 4800 cubic inch volume sizes
- ❖ Top repairable - reduces system downtime
- ❖ Very easy maintenance
- ❖ ASME standard & U stamp options available
- ❖ Temperature capabilities up to 300° F
- ❖ Internally & externally coated
- ❖ Largest unrestricted piping connection - 6" to 14"
- ❖ Standard elastomers available - Nitrile, EPDM, XRE, HNBR
- ❖ TFE Liners available
- ❖ Increases life on reciprocating pump fluid end & power end parts
- ❖ Reduces system fatigue failures
- ❖ Large gas volume provides higher performance

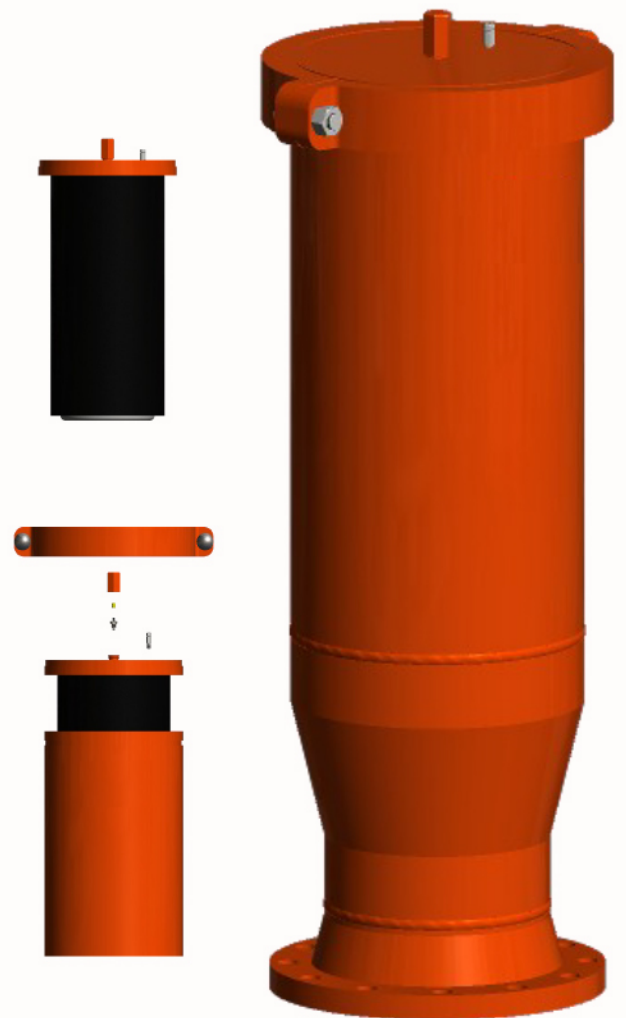

MODEL	VOLUME (cubic inch)	MAWP (psig)	BOTTOM CONNECTION	CARTRIDGE MATERIAL	ASSEMBLY PART #
SFG-1508-F-2400	2400	150	8" 150 RF ★ 6" - 14" ★ available	NITRILE	SFGS1508F2400N
				EPDM	SFGS1508F2400E
				XRE	SFGS1508F2400X
				HNBR	SFGS1508F2400H
				NITRILE/TFE Liner	SFGS1508F2400NT
				EPDM/TFE Liner	SFGS1508F2400ET
				XRE/TFE Liner	SFGS1508F2400XT
SFG-1508-F-4800	4800	150	8" 150 RF ★ 6" - 14" ★ available	NITRILE	SFGS1508F4800N
				EPDM	SFGS1508F4800E
				XRE	SFGS1508F4800X
				HNBR	SFGS1508F4800H
				NITRILE/TFE Liner	SFGS1508F4800NT
				EPDM/TFE Liner	SFGS1508F4800ET
				XRE/TFE Liner	SFGS1508F4800XT
				HNBR/TFE Liner	SFGS1508F4800HT

SPARE CARTRIDGES		MAX CHARGE (psig)	CARTRIDGE MATERIAL	CARTRIDGE PART #	
				2400	4800
2400 Cubic Inch 6 Ply	4800 Cubic Inch 6 Ply	100	NITRILE	SFG246N	SFG486N
			EPDM	SFG246E	SFG486E
			XRE	SFG246X	SFG486X
			HNBR	SFG246H	SFG486H
			NITRILE/TFE Liner	SFG246NT	SFG486NT
			EPDM/TFE Liner	SFG246ET	SFG486ET
			XRE/TFE Liner	SFG246XT	SFG486XT
			HNBR/TFE Liner	SFG246HT	SFG486HT
Spare Cartridge ships with gasket ⚠️ CHARGE CARTRIDGE WITH NITROGEN ONLY ⚠️ DO NOT EXCEED MAXIMUM CHARGE PRESSURE					

ACCESSORIES & SPARE PARTS	PART #
Charging Kit with 15' Hose	LAS001
Loading Valve	LV-1
Bleeder Valve	BV-1
Gasket (Standard Nitrile)	P0005081
Cartridge	SEE LEFT

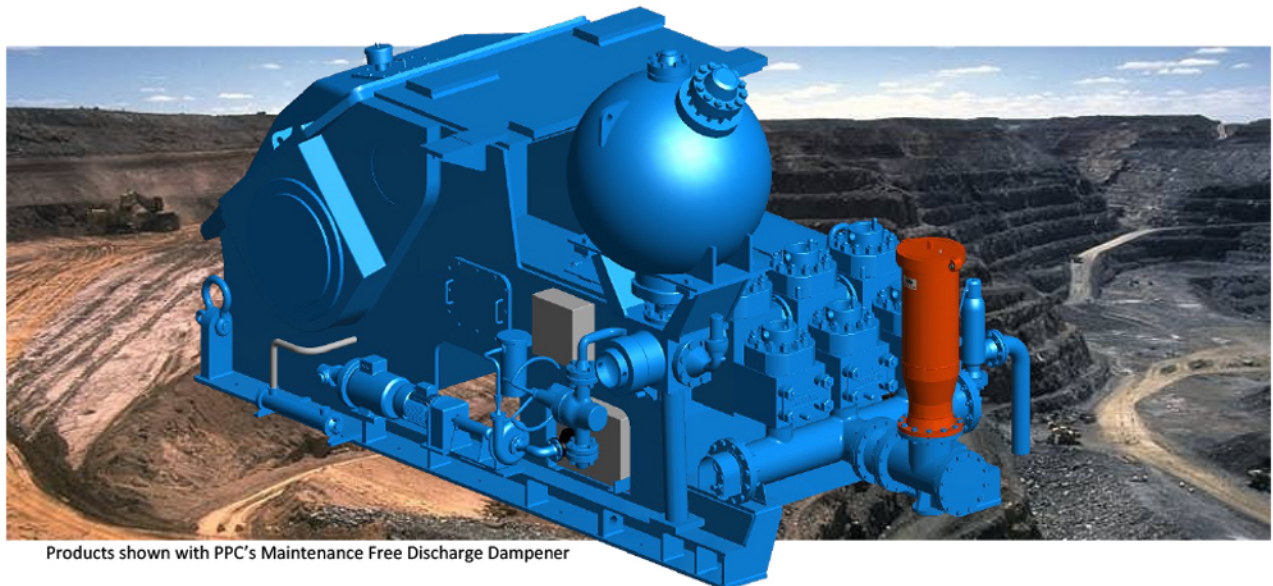

Products shown with PPC's Maintenance Free Discharge Dampener